


Range: **ASIA**  
 Type name: **CB100.1J**

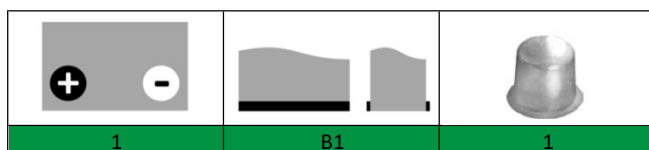

| PERFORMANCES*                          |              | CONFIGURATION |                      |
|--|--------------|---------------|----------------------|
| Voltage:                               | 12 V         | Size:         | 306x175x224 mm (D31) |
| Capacity:                              | 100 Ah (20h) | Polarity:     | 1                    |
| C. Cranking (EN):                      | 750 A        | Terminal:     | 1 (taper)            |
| Vibration (EN):                        | V1           | Holddown:     | B1                   |
| Duration (EN):                         | E2           | Ventilation:  | Central              |
| Self-Discharge:                        | 12 months    | Maintenance:  | Not required (MF)    |
| (from the date of production, at 25°C) |              |               |                      |

\*According to standard EN 50342

| INTERNAL CONSTRUCTION |                               | COMPONENTS      |                          |
|-----------------------|-------------------------------|-----------------|--------------------------|
| Tecnology:            | Punched, with regular surface | Box/Recipiente: | PP/black                 |
| Alloy:                | Calcium                       | Lid:            | Flat double, PP/black    |
| Separator:            | PE envelope                   | Plugs:          | Termal sealing, PP/black |
| Total Weight:         | 21,7 kg                       | Handles:        | On lid, PP/black         |
| Acid:                 | Inside the battery            |                 |                          |
| Origin:               | Europe                        |                 |                          |

| RECOMMENDATIONS |  |
|-----------------|--|
| Storage:        | Check voltage every 6 months. Avoid exposure to sub-zero temperatures. |
| Recharge:       | Use automatic chargers with constant voltage.                          |
| Installation:   | Not applicable to Start-Stop vehicles.                                 |