


Range: **INDUSTRIAL**

Type name: **CB180.3**

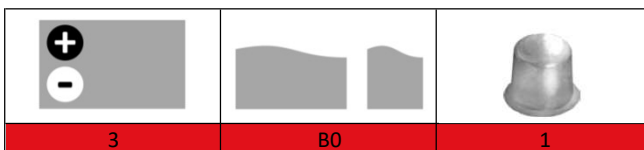

PERFORMANCES*	CONFIGURATION
Voltage: 12 V	Size: 513x223x223 mm (B)
Capacity: 180 Ah (20h)	Polarity: 3
C. Cranking (EN): 1100 A	Terminal: 1 (taper)
Vibration (EN): V2	Holddown: B0
Duration (EN): E1	Ventilation: Individual plugs
Self-Discharge: 12 months	Maintenance: Very Low maintenance
(from the date of production, at 25°C)	

*According to standard EN 50342

INTERNAL CONSTRUCTION	COMPONENTS
Tecnology: Punched, with regular surface	Box/Recipiente: PP/black
Alloy: Calcium	Lid: Flat, PP/black
Separator: PE envelope	Plugs: Screw, PP/black
Total Weight: 41,2 kg	Handles: On container, rope/black
Acid: Inside the battery	
Origin: Europe	

RECOMMENDATIONS	
Storage:	Check voltage every 6 months. Avoid exposure to sub-zero temperatures.
Recharge:	Use automatic chargers with constant voltage.
Installation:	Not applicable when batteries are located at the end of chassis.